CLIPPEDIMAGE= JP411066234A

PAT-NO: JP411066234A

DOCUMENT-IDENTIFIER: JP 11066234 A

TITLE: IMAGE-PROCESSING METHOD, RECORD MEDIUM RECORDED WITH THE

SAME AND IMAGE PROCESSOR THEREOF

PUBN-DATE: March 9, 1999

INVENTOR-INFORMATION:

NAME

MIYAMOTO, NOBUO AKIYAMA, TERUO OGURA, KENJI

ASSIGNEE-INFORMATION:

NAME

COUNTRY

NIPPON TELEGR & TELEPH CORP < NTT>

N/A

APPL-NO: JP09230896

APPL-DATE: August 27, 1997

INT-CL (IPC): G06K009/20

ABSTRACT:

PROBLEM TO BE SOLVED: To provide a method and a processor for image processing

which can accurately put document images one over the other at a high speed.

SOLUTION: A character recognition part 3 recognizes characters present at an

overlap part of a partial document image, and a character code matching part 4

matches them for extracting the character code string having a maximum number

of matching characters. A calculation part 5 for the quantity of displacement

between partial document images finds the quantity of displacement between a

couple of partial document images from the difference between character

circumscribed rectangle coordinates calculated by a character circumscribed

rectangle calculation part 2, and a connecting image composition

02/07/2003, EAST Version: 1.03.0002

11-66234

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

- 1. This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.**** shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

DETAILED DESCRIPTION

[Detailed Description of the Invention]

[The technical field to which invention belongs] this invention relates to the image-processing method and equipment which compound the document picture connected from two or more partial document pictures with a superposition portion. [0002]

[Description of the Prior Art] The method conventionally proposed as a method of piling up a picture has a common method of asking for the position where total (remainder) of the difference between the pixels which correspond the superposition portion of a picture with staggering little by little serves as the minimum. That is, when setting two partial document pictures to F(x y) and G(x y)(x=1, --, X, y=1, --, Y), the remainder Rij when shifting j pixels of both documents pictures relatively to i pixels and right and left up and down is given by the following formula.

[0003]

Rij=sigma S**F (x y)-G (x-i, y-j) ** -- here, S expresses a superposition field This Rij is calculated about the combination of various i and j, and a document picture is piled up in the position of i and j which give the minimum Rij. 100041

[Problem(s) to be Solved by the Invention] However, there was a problem that computational complexity became huge, by the conventional method. For example, even if it is the case where a superposition portion is 100 pixel x100 pixel, and the search range is 50 pixel x50 pixel, it is necessary to repeat operation of performing subtraction, absolute value operation, and addition 10000 times, respectively, 2500 times. Therefore, application was difficult, when treating the document picture of big size, or when requiring rapidity. Moreover, in the case of the small pattern of a period, compared with the search range of i and j, the problem that the superposition by the period deviated tends to happen also had a background.

[0005] this invention was made in view of the above-mentioned situation, and the technical problem is in offering the image-processing method and equipment which can perform superposition of a document picture at high speed and correctly. [0006]

[Means for Solving the Problem] this invention makes invention of the following (1) - (3) a means in order to solve the above-mentioned technical problem.

[0007] (1) The process which is the image-processing method which compounds the document picture which connected these from two or more partial document pictures with a superposition portion, and exists in each partial document picture and which computes the circumscription rectangle coordinate of this character pattern for every character pattern, The process which recognizes each character pattern surrounded with the aforementioned circumscription rectangle for every partial document picture, and generates the character code train for every partial document picture, Process in which a coincidence character code train in case the aforementioned character code train is collated among all partial document pictures and the number of coincidence characters becomes the maximum for every partial document picture pair is extracted. The process which computes the amount of displacement between partial document pictures about all partial document picture pairs from the circumscription rectangle coordinate within the partial document picture of the character code belonging to the aforementioned coincidence character code train, The image-processing method characterized by providing the process which compounds a copulative sentence paintings-and-calligraphic-works image using the amount of displacement about all partial document picture pairs. [0008] (2) The procedure in the image-processing method which compounds the document picture which connected these from two or more partial document pictures with a superposition portion which exists in each partial document picture and which computes the circumscription rectangle coordinate of this character pattern for every character pattern, The procedure which recognizes each character pattern surrounded with the aforementioned circumscription rectangle for every partial document picture, and generates the character code train for every partial document picture, The procedure of extracting a coincidence character code train in case the aforementioned character code train is collated among all partial document pictures and the number of coincidence characters becomes the maximum for every partial document picture pair. The procedure which computes the amount of displacement between partial document pictures about all partial document picture pairs from the circumscription rectangle coordinate within the partial document picture of the character code belonging to the aforementioned coincidence character code train, The record medium which recorded the image-processing method characterized by recording the program which makes a computer perform the procedure which compounds a copulative sentence paintings-and-calligraphic-works image using the amount of displacement about all partial document picture pairs on the medium which this computer can read. [0009] (3) A means which is the image processing system which compounds the document picture which connected these from

two or more partial document pictures with a superposition portion, and exists in each partial document picture to compute the circumscription rectangle coordinate of this character pattern for every character pattern, A means to recognize each character pattern surrounded with the aforementioned circumscription rectangle for every partial document picture, and to generate the character code train for every partial document picture, A means to extract a coincidence character code train in case the aforementioned character code train is collated among all partial document pictures and the number of coincidence characters becomes the maximum for every partial document picture pair, A means to compute the amount of displacement between partial document pictures about all partial document picture pairs from the circumscription rectangle coordinate within the partial document picture of the character code belonging to the aforementioned coincidence character code train. The image processing system characterized by providing a means to compound a copulative sentence paintings-and-calligraphic-works image using the amount of displacement about all partial document picture pairs.

[0010] In this invention, high-speed and exact superposition is realized by recognizing the character which exists in the superposition portion of a partial document picture using the alphabetic information in a document picture, and taking collating of a position by the character code level. The possible character pattern of character recognition processing usually has the size of about 10 pixels of dozens of pixel x numbers. Therefore, for example, in the case of a 100 pixel x100 pixel superposition portion, generally, only dozens of characters are contained. If the number of characters contained in a superposition portion is assumed to be ten pieces, it cannot pass over the number of times of character code collating at most to 10x10 times, but it can find out the superposition position of a picture at very high speed, and can perform superposition at high speed. Moreover, since the influence of a periodic pattern etc. can be eliminated few, it can raise the precision of superposition that the character string same in a document appears periodically except for a special document.

[Embodiments of the Invention] Hereafter, the example of an operation gestalt of this invention is explained in detail with reference to a drawing.

[0012] Drawing 1 is the block diagram of the image processing system of the example of 1 operation gestalt of this invention. [0013] the image processing system of this example of an operation gestalt -- between the partial document picture storing section 1, the character circumscription rectangle calculation section 2, the character recognition section 3, the character code train collating section 4, and a partial document picture -- a variation rate -- it consists of the amount calculation section 5, the copulative sentence paintings-and-calligraphic-works image composition section 6, and the copulative sentence paintings-and-calligraphic-works image storing section 7 between the portion 2 surrounded with the dashed line in drawing 1, i.e., the character circumscription rectangle calculation section, the character recognition section 3, the character code train collating section 4, and a partial document picture -- a variation rate -- the amount calculation section 5 is the portion added by

[0014] The set of a partial document picture with a superposition portion is stored in the partial document picture storing section

[0015] The character circumscription rectangle calculation section 2 reads at a time one partial document picture stored in the partial document picture storing section 1, and computes a circumscription rectangle coordinate about each of the character pattern which exists in a picture.

[0016] The character recognition section 3 recognizes each character pattern surrounded with the circumscription rectangle computed in the character circumscription rectangle calculation section 2, and generates a character code train for every partial document picture.

[0017] The character code train collating section 4 collates the character code train acquired in the character recognition section 3 about the pair of all partial document pictures, and extracts a coincidence character code train in case the number of coincidence characters becomes the maximum.

[0018] between partial document pictures -- a variation rate -- the variation rate of the average of the difference of the circumscription rectangle coordinate within both the partial document picture of the character code to which the amount calculation section 5 belongs to a coincidence character code train for every partial document picture pair to both the partial document picture -- an amount is computed

[0019] the copulative sentence paintings-and-calligraphic-works image composition section 6 -- between partial document pictures -- a variation rate -- the variation rate for every partial document picture pair computed in the amount calculation section 5 -- a copulative sentence paintings-and-calligraphic-works image is compounded based on an amount, and it stores in the copulative sentence paintings-and-calligraphic-works image storing section 7

[0020] Thus, with operation and the operation of an image processing system which were constituted, the example of 1 operation gestalt of the image-processing method of this invention is explained. Drawing 2 - drawing 5 are flow charts which show the example of 1 operation gestalt of the image-processing method of this invention with operation of the image processing system shown in drawing 1.

[0021] First, in Step 10, a partial document picture is read and a character circumscription rectangle coordinate is computed at Step 11.

[0022] The character in a circumscription rectangle is recognized at Step 12, and a character pattern is changed into a character code. This processing is repeated until recognition of all the character patterns within all partial document pictures is completed, as shown by judgment processing of Step 13 and Step 14.

[0023] Then, processing about the n-th view partial document picture from Step 15 to Step 51 is performed. It is n after 1 addition and at Step 17 in Step 16 first Character code train A1A2 of the n-th partial document picture -- Ap is read. Then, n+1 is

2 of 4 2/7/03 5:29 PM set up at Step 18 as initial value of the number m of the collating place partial document picture over the n-th view partial document picture n, and it is character code train B1 B-2 of the m-th partial document picture at Step 19. -- Bq is read. [0024] They are A1+sA2+s--Ap and B1 B-2 at the step 21 after setting up 0 to the collating initial-statement character location number s in Step 20. -- Counting of the k1 coincidence character (s) of Bp-s is carried out. 1 is added to s at Step 22, and s judges whether it is under p at Step 23. When s is under p, counting with k1 coincidence character (s) is repeated about new s. [0025] When s becomes more than p, it is the stepA1A2 after setting up 0 in 25 again to the collating initial-statement character location number s at Step 24 of drawing 3. -- They are A1+s and Bq-sBq-s+1. -- Counting of the k2 coincidence character (s) of Bq is carried out. 1 is added to s at Step 26, and s judges whether it is under q at Step 27. When s is under q, counting with k2 coincidence character (s) is repeated about new s.

[0026] When s becomes more than q, it progresses to Step 28, s which makes k1 coincidence character (s) the maximum is substituted for S1, andk1 (S1) is substituted for StepK1 29. s which makes k2 coincidence character (s) the maximum is substituted [similarly,] for Step 30 and Step 31 S2, and k2 (S2) is substituted for K2. Then, it judges whetherK1 is larger than StepK2 at 32. When K1 is larger than K2, S1 is substituted for S, and it substitutes K1 for Step 33 and Step 34 at K. When K1 is less than [K2], S2 are substituted for S, and it substitutes K2 for Step 35 and Step 36 at K.

[0027] K obtained by doing in this way at Step 37 judges whether it is 0, and it considers that he has no superposition portion at the time of 0, jumps to Step 48 of <u>drawing 5</u>, and progresses to processing of the following collating place partial document picture. When K is not 0, it is [-- creatine kinase is extracted.] A1A2 based on the value of S at Step 38 of <u>drawing 4</u>. -- They are Ap and B1 B-2. -- It is coincidence character code train C1C2 of Bq.

[0028] next, the circumscription-at step 40 after setting 1 as coincidence character code number k as initial value at Step 39 rectangle coordinate in the n-th partial document picture about a character code Ck (XSn, YSn) -- and (XEn, YEn) it takes out furthermore, the circumscription-at Step 40 rectangle coordinate in the m-th partial document picture about Ck (XSm, YSm) -- and (XEm, YEm) -- taking out -- Step 41 -- the difference of both coordinate values --

:DXSnm=XSm-XSnDYSnm=YSm-YSnDXEnm=XEm-XEnDYEnm=YEm-YEn is computed After adding 1 to k at Step 43, k judges whether it is under K at Step 44. When k is under K, the processing which asks for the difference of a coordinate about the following coincidence character code is repeated. When k is more than K, the average DX about all the coincidence character codes of DXSnm and DXEnm is computed at Step 45. Similarly, the average DY of DYSnm and DYEnm is computed at Step 46. Since (DX, DY) are considered to be average gaps of the view partial document picture n and the collating place partial document picture m, the n-th partial document picture are shifted and (DX, DY) piled up at Step 47.

[0029] If the above processing is completed, 1 will be added to m at Step 48 of <u>drawing 5</u>, and it will judge whether m is larger than the number of partial document pictures at Step 49. When m is below the number of partial document pictures, the processing after Step 19 of <u>drawing 2</u> is repeated. m adds 1 to n at Step 50, when larger than the number of partial document pictures, and it judges whether n is larger than the number of partial document pictures at Step 51. When n is below the number of partial document pictures, the processing after Step 16 of <u>drawing 1</u> is repeated. n ends processing, when larger than the number of partial document pictures.

[0030] although the above explanation explained the case of p<=q -- the case of p>q -- the number of coincidence characters -- it can respond by changing the number of times of a repeat of counting Moreover, when two or more character rows exist in a superposition portion, it is easily extensible by performing processing explained above for every line.

[0031] <u>Drawing 3</u> is drawing explaining a circumscription rectangle coordinate, and a character circumscription rectangle coordinate expresses the position of the right-and-left edge of the character in a document picture, and a vertical edge. In other words, the coordinate of the upper left peak when surrounding a character with a rectangle and the lower right peak is expressed. [0032] drawing where <u>drawing 4</u> explains the flow of processing -- it is -- 100 -- a view partial document picture and 101 -- a collating place partial document picture and 102 -- the recognition result character code train of a view partial document picture, and 103 -- the recognition result character code train of a collating place partial document picture, and 104 -- the number of coincidence characters -- counting -- as for the range and 105, the number of coincidence characters and 106 are copulative sentence paintings-and-calligraphic-works images

[0033] The view partial document picture 100 and the collating place partial document picture 101 have a circumscription rectangle coordinate for every character computed, and the character code train 102 "Kanagawa Kawasaki" and 103 "**** Saiwai-ku, Kawasaki-shi" are generated by character recognition processing, respectively. Next, processing which shifts one character at a time rightward, and carries out counting of the 105 coincidence characters is performed until a superposition portion is lost. Then, processing which shifts one character at a time also leftward, and carries out counting of the 105 coincidence characters is performed until a superposition portion is lost. the above counting -- it asks for the position (the example of drawing 4 the 3rd time of rightward collating processing) where the number of coincidence characters for which it asked by processing becomes the maximum, and the result of the coincidence character at that time "a river", a "prefecture", a "river", and "**" which piled up the view partial document picture 100 and the collating place partial document picture 101 so that a circumscription rectangle might be in agreement is the copulative sentence paintings-and-calligraphic-works image 106 [0034] In addition, although this example of an operation gestalt explained the case of a document picture, it is applicable also to the general picture containing a character pattern.

[0035] The equipment which this invention saves data and applies them to the hard disk and it which can be read freely, The equipment which applies to a required buffer and required it in case data are processed, and the cutting point finally detected are displayed. Based on the equipment according to the computer which was equipped with equipments, such as a display to output,

and was equipped with the central arithmetic unit which controls these hard disks, a buffer, a display, etc. based on the procedure which was able to be defined beforehand, or it It is possible to realize by giving and performing [control and] the object according to the processing program which described the method or algorithm shown in a series of drawings to processing, drawing 2, or drawing 7 of the example of an operation gestalt mentioned above, or it to this computer. In case a computer performs the object according to this processing program or it here, it records on the storage according to CD-ROM which can perform read-out, a floppy disk (FD), a magneto-optic disk (MO), or them, and distributing is possible.

[Effect of the Invention] Since according to this invention the character pattern which exists not in a pixel but in a document picture is recognized and superposition of a document picture is performed based on the positional information as explained above, high-speed and exact picture superposition becomes possible, and the image-processing method and equipment which can be applied when aimed at the document picture of big size, or when requiring rapidity can be realized.

[Translation done.]

(19)日本国特許庁 (JP)

(12) 公開特許公報(A)

(11)特許出願公開番号

特開平11-66234

(43)公開日 平成11年(1999)3月9日

(51) Int.CL6

識別配号

FI

G06K 9/20

340

G06K 9/20

340P

審査請求 未請求 請求項の数3 OL (全 10 頁)


(21)出顧番号	特顧平9-230896	(71)出顧人	
			日本電信電話株式会社
(22) 出顧日	平成9年(1997)8月27日		東京都新宿区西新宿三丁目19番2号
		(72)発明者	宮本 信夫
		*	東京都新宿区西新宿3丁目19番2号 日本
			電信電話株式会社内
		(72) 孕明者	秋山 黒雄
		(12/32/31)	東京都新宿区西新宿3丁目19番2号 日本
			電信電話株式会社内
		(72)発明者	小倉 健司
			東京都新宿区西新宿3丁目19番2号 日本
			電信電話株式会社内
		(74)代理人	弁理士 志賀 富士弥 (外1名)

(54) 【発明の名称】 画像処理方法及びその方法を記録した記録媒体及び画像処理装置

(57)【要約】

【課題】 高速かつ正確に文書画像の重ね合わせを行える画像処理方法及び装置を提供する。

【解決手段】 部分文書画像の重量部分に存在する文字を文字認識部3で認識し、文字コード照合部4で照合を行い、一致文字数が最大となる文字コード列を抽出する。部分文書画像間変位量算出部5は、抽出文字コード列についての文字外接矩形算出部2で算出した文字外接矩形座標の差分から部分文書画像対の変位量を求め、この変位量を元に連結画像合成部6が重ね合わせを行う。文字認識処理の可能な文字パタンは通常、数十画素米数十画素程度の大きさであるため、極めて高速に画像の重量位置を見い出すことができ、高速な重ね合わせが実現できる。また、文書中に同じ文字列が周期的に出現することは少なく、周期的な模様等の影響を排除できるため、重ね合わせの特度を向上させることができる。

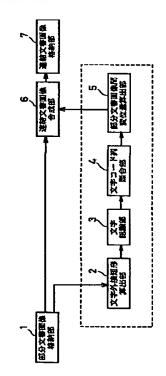

【特許請求の範囲】

【請求項1】 重畳部分を持つ複数の部分文書画像から これらを連結した文書画像を合成する画像処理方法であ って、

各部分文書画像中に存在する文字パタン毎に、該文字パ タンの外接矩形座標を算出する過程と、

部分文書画像毎に前記外接矩形で囲まれる各文字パタン の認識を行い、部分文書画像毎の文字コード列を生成す る過程と、

全ての部分文書画像間で前記文字コード列の照合を行 い、部分文書画像対毎に一致文字数が最大になるときの 一致文字コード列を抽出する過程と、

全ての部分文書画像対について、前記一致文字コード列 に属する文字コードの部分文書画像内の外接矩形座標か ら部分文書画像間の変位量を算出する過程と、

全ての部分文書画像対についての変位量を用いて連結文 書画像を合成する過程と、

を具備することを特徴とする画像処理方法。

【請求項2】 重畳部分を持つ複数の部分文書画像から ける、

各部分文書画像中に存在する文字パタン毎に、該文字パ タンの外接矩形座標を算出する手順と、

部分文書画像毎に前記外接矩形で囲まれる各文字パタン の認識を行い、部分文書画像毎の文字コード列を生成す る手順と、

全ての部分文書画像間で前記文字コード列の照合を行 い、部分文書画像対毎に一致文字数が最大になるときの 一致文字コード列を抽出する手順と、

に属する文字コードの部分文書画像内の外接矩形座標か ら部分文書画像間の変位量を算出する手順と、

全ての部分文書画像対についての変位量を用いて連結文 書画像を合成する手順と、

をコンピュータに実行させるプログラムを、該コンピュ ータが読み取り可能な媒体に記録した、

ことを特徴とする画像処理方法を記録した記録媒体。

【請求項3】 重畳部分を持つ複数の部分文書画像から これらを連結した文書画像を合成する画像処理装置であ って、

各部分文書画像中に存在する文字パタン毎に、該文字パ タンの外接矩形座標を算出する手段と、

部分文書画像毎に前記外接矩形で囲まれる各文字パタン の認識を行い、部分文書画像毎の文字コード列を生成す る手段と

全ての部分文書画像間で前記文字コード列の照合を行 い、部分文書画像対毎に一致文字数が最大になるときの 一致文字コード列を抽出する手段と、

全ての部分文書画像対について、前記一致文字コード列 に属する文字コードの部分文書画像内の外接矩形座標か 50 ときの一致文字コード列を抽出する過程と、全ての部分

ら部分文書画像間の変位量を算出する手段と、

全ての部分文書画像対についての変位量を用いて連結文 書画像を合成する手段と、

を具備することを特徴とする画像処理装置。

【発明の詳細な説明】

[0001]

【発明の属する技術分野】本発明は、重畳部分を持つ複 数の部分文書画像から連結した文書画像を合成する画像 処理方法及び装置に関するものである。

10 [0002]

> 【従来の技術】画像を重ね合わせる方法として従来より 提案されている方法は、画像の重畳部分を少しずつずら しながら対応する画素間の差の総和(残差)が最小とな る位置を求める方法が一般的である。すなわち、2つの 部分文書画像をF(x, y)、G(x, y)(x=1, …, X, y=1, …, Y) とするとき、両文書画像を上 下にi画素、左右にj画素、相対的にずらしたときの残 差Rijは次式で与えられる。

[0003]

これらを連結した文書画像を合成する画像処理方法にお 20 $Rij = \Sigma s \mid F(x,y) - G(x-i,y-j) \mid$ ここで、Sは重畳領域を表す。このRijをいろいろな i, jの組み合わせについて計算し、最小のRijを与 えるi, jの位置で文書画像を重ね合わせる。

[0004]

【発明が解決しようとする課題】しかしながら従来の方 法では、計算量が膨大となるという問題があった。例え ば、重畳部分が100画素×100画素、探索範囲が5 0画素×50画素の場合であっても、減算、絶対値演 算、加算をそれぞれ10000回行う操作を2500回 全ての部分文書画像対について、前記一致文字コード列 30 繰り返す必要がある。そのため、大きなサイズの文書画 像を扱う場合や、高速性を要する場合には適用が困難で あった。また、背景がi,jの探索範囲に比べて小さな 周期の模様の場合には、周期分だけずれた重ね合わせが 起こりやすいという問題もあった。

> 【0005】本発明は、上記事情に鑑みてなされたもの で、その課題は、高速かつ正確に文書画像の重ね合わせ を行える画像処理方法及び装置を提供することにある。 [0006]

【課題を解決するための手段】本発明は、上記課題を解 40 決するため、以下の(1)~(3)の発明を手段とす

【0007】(1)重畳部分を持つ複数の部分文書画像 からこれらを連結した文書画像を合成する画像処理方法 であって、各部分文書画像中に存在する文字パタン毎 に、該文字パタンの外接矩形座標を算出する過程と、部 分文書画像毎に前記外接矩形で囲まれる各文字パタンの 認識を行い、部分文書画像毎の文字コード列を生成する 過程と、全ての部分文書画像間で前記文字コード列の照 合を行い、部分文書画像対毎に一致文字数が最大になる

文書画像対について、前記一致文字コード列に属する文字コードの部分文書画像内の外接矩形座標から部分文書画像間の変位量を算出する過程と、全ての部分文書画像対についての変位量を用いて連結文書画像を合成する過程と、を具備することを特徴とする画像処理方法。

【0008】(2) 重畳部分を持つ複数の部分文書画像 からこれらを連結した文書画像を合成する画像処理方法 における、各部分文書画像中に存在する文字パタン毎 に、該文字パタンの外接矩形座標を算出する手順と、部 分文書画像毎に前記外接矩形で囲まれる各文字パタンの 認識を行い、部分文書画像毎の文字コード列を生成する 手順と、全ての部分文書画像間で前記文字コード列の照 合を行い、部分文書画像対毎に一致文字数が最大になる ときの一致文字コード列を抽出する手順と、全ての部分 文書画像対について、前記一致文字コード列に属する文 字コードの部分文書画像内の外接矩形座標から部分文書 画像間の変位量を算出する手順と、全ての部分文書画像 対についての変位量を用いて連結文書画像を合成する手 順と、をコンピュータに実行させるプログラムを、該コ ンピュータが読み取り可能な媒体に記録したことを特徴 20 とする画像処理方法を記録した記録媒体。

【0009】(3)重畳部分を持つ複数の部分文書画像からこれらを連結した文書画像を合成する画像処理装置であって、各部分文書画像中に存在する文字パタン毎に、該文字パタンの外接矩形座標を算出する手段と、部分文書画像毎に前記外接矩形で囲まれる各文字パタンの認識を行い、部分文書画像毎の文字コード列を生成する手段と、全ての部分文書画像対毎に一致文字数が最大になるときの一致文字コード列を抽出する手段と、全ての部分文書画像対について、前記一致文字コード列に属する文字コードの部分文書画像内の外接矩形座標から部分文書画像間の変位量を算出する手段と、全ての部分文書画像関の変位量を算出する手段と、全ての部分文書画像対についての変位量を用いて連結文書画像を合成する手段と、を具備することを特徴とする画像処理装置。

【0010】本発明では、文書画像中の文字情報を利用して、部分文書画像の重畳部分に存在する文字を認識し、文字コードレベルで位置の照合をとることにより、高速かつ正確な重ね合わせを実現する。文字認識処理の可能な文字パタンは通常、数十画素×数十画素程度の大きさがある。そのため、例えば、100画素×100画素の重畳部分の場合には、一般に数十文字しか含まれない。重畳部分に含まれる文字数を10個と仮定すると、文字コード照合回数は高々10×10回に過ぎず、極めて高速に画像の重畳位置を見い出すことができ、高速に重ね合わせを行うことができる。また、特別な文書を除いて、文書中に同じ文字列が周期的に出現することは少なく、また周期的な模様等の影響を排除できることから、重ね合わせの精度を向上させることができる。

[0011]

【発明の実施の形態】以下、本発明の実施形態例を図面を参照して詳細に説明する。

【0012】図1は、本発明の一実施形態例の画像処理 装置のブロック図である。

【0013】本実施形態例の画像処理装置は、部分文書画像格納部1と、文字外接矩形算出部2と、文字認識部3と、文字コード列照合部4と、部分文書画像間変位量算出部5と、連結文書画像合成部6と、連結文書画像格納部7とで構成されている。図1において、破線で囲んだ部分、すなわち文字外接矩形算出部2と、文字認識部3と、文字コード列照合部4と、部分文書画像間変位量算出部5が、本発明で追加した部分である。

【0014】部分文書画像格納部1には、重畳部分を持つ部分文書画像の集合が格納されている。

【0015】文字外接矩形算出部2は、部分文書画像格 納部1に格納されている部分文書画像を1枚ずつ読み出 し、画像中に存在する文字パタンの各々について外接矩 形座標を算出する。

【0016】文字認識部3は、文字外接矩形算出部2で 算出された外接矩形で囲まれる各文字パタンの認識を行 い、部分文書画像毎に文字コード列を生成する。

【0017】文字コード列照合部4は、全ての部分文書 画像の対について、文字認識部3で得られた文字コード 列の照合を行い、一致文字数が最大になるときの一致文 字コード列を抽出する。

【0018】部分文書画像間変位量算出部5は、部分文 書画像対毎に、一致文字コード列に属する文字コードの 両部分文書画像内における外接矩形座標の差分の平均値 から両部分文書画像の変位量を算出する。

30 【0019】連結文書画像合成部6は、部分文書画像間 変位量算出部5で算出された部分文書画像対毎の変位量 をもとに連結文書画像を合成し、連結文書画像格納部7 に格納する。

【0020】このように構成した画像処理装置の動作および作用とともに、本発明の画像処理方法の一実施形態例を説明する。図2~図5は、図1に示した画像処理装置の動作とともに、本発明の画像処理方法の一実施形態例を示すフローチャートである。

高速かつ正確な重ね合わせを実現する。文字認識処理の 【0021】まず、ステップ10において、部分文書画 可能な文字パタンは通常、数十画素×数十画素程度の大 40 像を読み込み、ステップ11で文字外接矩形座標を算出 きさがある。そのため、例えば、100画素×100画 する。

【0022】ステップ12で外接矩形内の文字の認識を行い、文字パタンを文字コードに変換する。この処理はステップ13およびステップ14の判定処理で示されるように、全ての部分文書画像内の全ての文字パタンの認識が完了するまで繰り返される。

【0023】続いてステップ15からステップ51までの第n着目部分文書画像についての処理を行う。まずステップ16でnを1加算後、ステップ17で第n部分文

50 書画像の文字コード列A1A2…Apを読込む。続いて、

ステップ18で第 n着目部分文書画像 n に対する照合先 部分文書画像の番号mの初期値としてn+1を設定し、 ステップ19で第m部分文書画像の文字コード列B1B2 …B & 読込む。

【0024】ステップ20で照合開始文字位置番号sに Oを設定後、ステップ21でA1+s A2+s…ApとB1 B2 …Bp-sの一致文字数k1(s)を計数する。ステップ2 2でsに1を加算し、ステップ23でsがp未満か否か を判定する。sがp未満のときは、新たなsについて一 致文字数k1(s)の計数を繰り返す。

【0025】sがp以上になったときは、図3のステッ プ24で照合開始文字位置番号sに再び0を設定後、ス テップ25でA1 A2…A1+sとBg-sBg-s+1…Bgの一致 文字数k2(s)を計数する。ステップ26でsに1を 加算し、ステップ27でsがq未満か否かを判定する。 sがq未満のときは、新たなsについて一致文字数kz (s)の計数を繰り返す。

【0026】 sが q以上になったときは、ステップ28 へ進み、一致文字数k1(s)を最大にするsをS1に代 入し、ステップ29でk1(S1)をK1に代入する。同 様に、ステップ30、ステップ31で一致文字数k 2(s)を最大にするsをS2に、k2(S2)をK2に代 入する。続いて、ステップ32でK1がK2より大きいか 否かを判定する。K1がK2より大きいときは、ステップ 33、ステップ34でSにS1、KにK1を代入する。K 1がK2以下のときは、ステップ35、ステップ36でS にS2、KにK2を代入する。

【0027】 ステップ37でこのようにして得られたK が0か否かを判定し、0のときは重畳部分無しと見な し、図5のステップ48ヘジャンプし、次の照合先部分 30 列、104は一致文字数計数範囲、105は一致文字 文書画像の処理に進む。KがOでないときは、図4のス テップ38でSの値をもとに、A1A2…ApとB1B2… B_qの一致文字コード列C₁C₂···C_Kを抽出する。

【0028】次に、ステップ39で一致文字コード番号 kに初期値として1を設定した後、ステップ40で文字 コードCkについての第n部分文書画像中における外接 矩形座標 (Xsn, Ysn) および (Xnn, Ynn) を取出 す。さらに、ステップ40でCkについての第m部分文 書画像中における外接矩形座標(Xsa, Ysa)および (XEm, YEm) 取出し、ステップ41で両座標値の差 分:

 $DX_{Sna} = X_{Sa} - X_{Sn}$

 $DY_{Sna} = Y_{Sa} - Y_{Sn}$

 $DX_{Bna} = X_{Ba} - X_{Bn}$

 $DY_{Bno} = Y_{Bo} - Y_{Bn}$

を算出する。ステップ43でkに1を加算した後、ステ ップ44でkがK未満か否かを判定する。kがK未満の ときは次の一致文字コードについて座標の差分を求める 処理を繰り返す。kがK以上のときは、ステップ45で DXsna, DXsnaの全一致文字コードについての平均値 50 読み出し可能なハードディスクやそれに準ずる装置と、

DXを算出する。同様に、ステップ46でDYsna, D Ygonの平均値DYを算出する。(DX, DY) は着目 部分文書画像nと照合先部分文書画像mの平均的なずれ と考えられるので、ステップ47で第n部分文書画像と 第m部分文書画像とを(DX, DY)ずらして重ね合わ

【0029】以上の処理が完了したら、図5のステップ 48でmに1を加算し、ステップ49でmが部分文書画 像数より大きいか否かの判定を行う。mが部分文書画像 10 数以下の時は図2のステップ19以降の処理を繰り返 す。mが部分文書画像数より大きい時は、ステップ50 でnに1を加算し、ステップ51でnが部分文書画像数 より大きいか否かの判定を行う。nが部分文書画像数以 下の時は図1のステップ16以降の処理を繰り返す。n が部分文書画像数より大きい時は、処理を終了する。 【0030】以上の説明では、p≤qの場合について説 明したが、p>qの場合も一致文字数計数の繰り返し回 数を切り替えることで対応可能である。また、重畳部分 に複数の文字行が存在する場合も、以上説明した処理を 20 行毎に行うことで容易に拡張可能である。

【0031】図3は外接矩形座標を説明する図であっ て、文字外接矩形座標とは、文書画像中における文字の 左右端および上下端の位置を表す。言い換えると、文字 を矩形で囲んだときの左上頂点および右下頂点の座標を

【0032】図4は処理の流れを説明する図であって、 100は着目部分文書画像、101は照合先部分文書画 像、102は着目部分文書画像の認識結果文字コード 列、103は照合先部分文書画像の認識結果文字コード 数、106は連結文書画像である。

【0033】着目部分文書画像100、照合先部分文書 画像101は、文字毎の外接矩形座標を算出され、文字 認識処理により、それぞれ文字コード列102 "神奈川 県川崎"、103 "川県川崎市幸区"が生成される。次 に、右方向に1文字ずつずらして一致文字数105を計 数する処理を重畳部分がなくなるまで実行する。続い て、左方向にも1文字ずつずらして一致文字数105を 計数する処理を重畳部分がなくなるまで実行する。以上 40 の計数処理で求めた一致文字数が最大になる位置(図4 の例では、右方向照合処理の3回目)を求め、そのとき の一致文字"川""県""川""崎"の外接矩形が一致 するように着目部分文書画像100、照合先部分文書画 像101を重ね合わせた結果が連結文書画像106であ

【0034】なお、本実施形態例は文書画像の場合につ いて説明したが、文字パタンを含む一般画像へも適用可 能である。

【0035】本発明は、データを保存しそれらを自由に

データを処理する際に必要なバッファやそれに準ずる装置と、最終的に検出されたカット点を表示、出力するディスプレイなどの装置を備え、それらハードディスク、バッファ及びディスプレイなどをあらかじめ定められた手順に基いて制御する中央演算装置などを備えたコンピュータやそれに準ずる装置を基に、上述した実施形態例の処理、ないしは、図2ないし図7までの一連の図に示した方法ないしアルゴリズムを記述した処理プログラムやそれに準ずる物を、該コンピュータに対して与え、制御、実行させることで実現することが可能である。ここ 10で、該処理プログラムやそれに準ずる物を、コンピュータが実行する際に読み出しを実行できるCD-ROM、フロッピーディスク(FD)、光磁気ディスク(MO)あるいはそれらに準ずる記憶媒体に記録して、配布することが可能である。

[0036]

【発明の効果】以上説明したように、本発明によれば、 画素ではなく文書画像中に存在する文字パタンを認識 し、その位置情報をもとに文書画像の重ね合わせを行う ので、高速かつ正確な画像重ね合わせが可能となり、大 20 きなサイズの文書画像を対象とする場合や、高速性を要 する場合にも適用可能な画像処理方法及び装置が実現で きる。

【図面の簡単な説明】

【図1】本発明の一実施形態例の画像処理装置を示すブロック図である。

【図2】本発明の一実施形態例の画像処理装置の動作と ともに本発明での画像処理方法の一実施形態例を示すフ ローチャート(その1)である。 【図3】本発明の一実施形態例の画像処理装置の動作と ともに本発明での画像処理方法の一実施形態例を示すフローチャート(その2)である。

8

【図4】本発明の一実施形態例の画像処理装置の動作と ともに本発明での画像処理方法の一実施形態例を示すフローチャート (その3)である。

【図5】本発明の一実施形態例の画像処理装置の動作と ともに本発明での画像処理方法の一実施形態例を示すフローチャート(その4)である。

【図6】上記実施形態例での外接矩形座標を説明する図 である


【図7】上記実施形態例での処理の流れを説明する図である。

【符号の説明】


- 1…部分文書画像格納部
- 2…文字外接矩形算出部
- 3…文字認識部
- 4…文字コード列照合部
- 5…部分文書画像間変位量算出部
- 20 6…連結文書画像合成部
 - 7…連結文書画像格納部
 - 10~51…ステップ
 - 100…着目部分文書画像
 - 101…照合先部分文書画像
 - 102…着目部分文書画像の認識結果文字コード列
 - 103…照合先部分文書画像の認識結果文字コード列
 - 104…一致文字数計数範囲
 - 105…一致文字数
 - 106…連結文書画像


.

【図2】

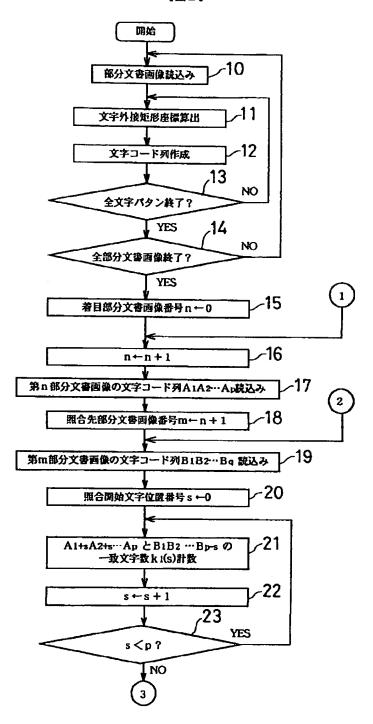


【図3】

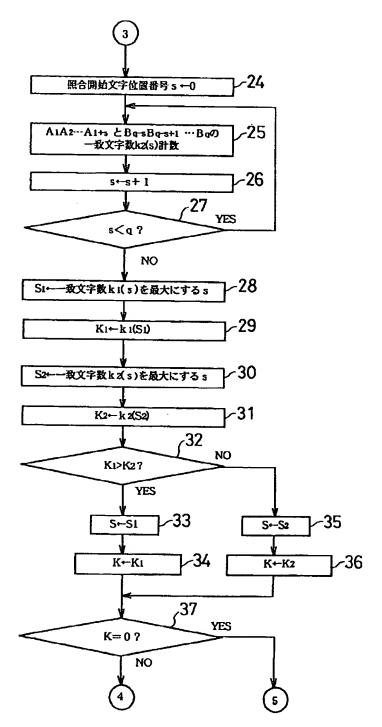


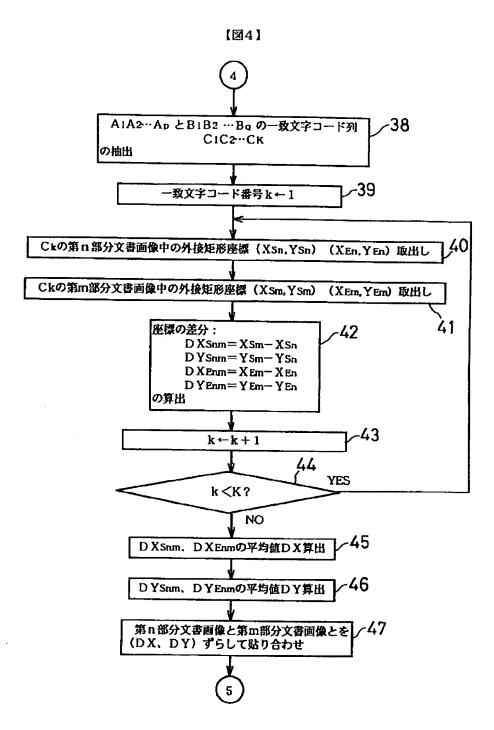

【図5】

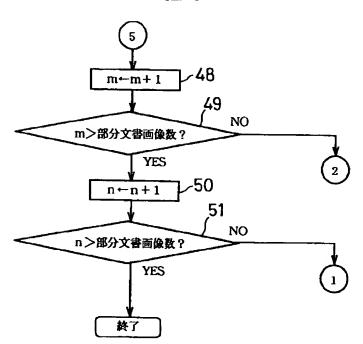

【図7】

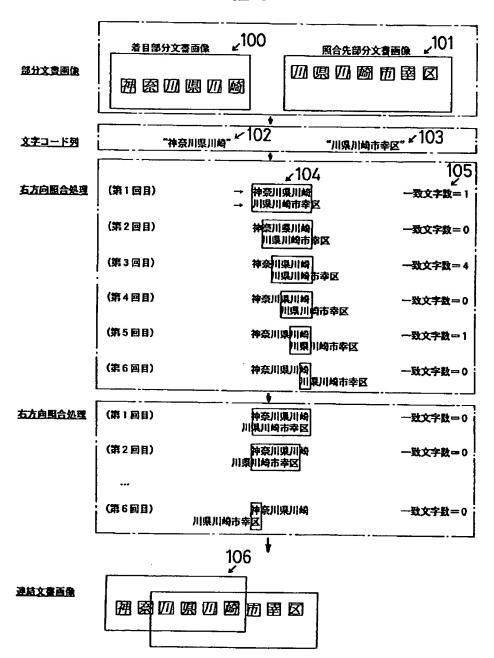

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

- 1. This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.**** shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

DESCRIPTION OF DRAWINGS

[Brief Description of the Drawings]

Drawing 1] It is the block diagram showing the image processing system of the example of 1 operation gestalt of this invention.

Drawing 2] It is the flow chart (the 1) which shows the example of 1 operation gestalt of the image-processing method in this invention with operation of the image processing system of the example of 1 operation gestalt of this invention.

[Drawing 3] It is the flow chart (the 2) which shows the example of 1 operation gestalt of the image-processing method in this invention with operation of the image processing system of the example of 1 operation gestalt of this invention.

[Drawing 4] It is the flow chart (the 3) which shows the example of 1 operation gestalt of the image-processing method in this invention with operation of the image processing system of the example of 1 operation gestalt of this invention.

[Drawing 5] It is the flow chart (the 4) which shows the example of 1 operation gestalt of the image-processing method in this invention with operation of the image processing system of the example of 1 operation gestalt of this invention.

[Drawing 6] It is drawing explaining the circumscription rectangle coordinate in the above-mentioned example of an operation gestalt.

[Drawing 7] It is drawing explaining the flow of processing in the above-mentioned example of an operation gestalt.

[Description of Notations]

- 1 -- Partial document picture storing section
- 2 -- Character circumscription rectangle calculation section
- 3 -- Character recognition section
- 4 -- Character code train collating section

between 5 -- partial document pictures -- a variation rate -- the amount calculation section

- 6 -- Copulative sentence paintings-and-calligraphic-works image composition section
- 7 -- Copulative sentence paintings-and-calligraphic-works image storing section

10-51 -- Step

- 100 -- View partial document picture
- 101 -- Collating place partial document picture
- 102 -- Recognition result character code train of a view partial document picture
- 103 -- Recognition result character code train of a collating place partial document picture

the number of 104 -- coincidence characters -- counting -- the range

- 105 -- The number of coincidence characters
- 106 -- Copulative sentence paintings-and-calligraphic-works image

[Translation done.]